

A

Please type a plus sign (+) inside this box → ☐Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 79628

First Inventor or Application Identifier R. C. Adams et al.

Title DEVICE FOR SIMULTANEOUS TRANSMISSION OF  
TWO SIGNALS WITH IDENTICAL FREQUENCY

Express Mail Label No. EL261967844US

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 24]  
(preferred arrangement set forth below)
- Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 5]
4. Oath or Declaration [Total Pages 3]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
- i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney  
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure Statement (IDS)/PTO-1449 [11] Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity Statement filed in prior application,  
Statement(s) Status still proper and desired  
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☐ Other: \_\_\_\_\_

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY  
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT  
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied  
under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by  
reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**17. CORRESPONDENCE ADDRESS**☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	COMMANDING OFFICER				
	OFFICE OF PATENT COUNSEL D0012				
Address	SPAWARSSYSCEN SAN DIEGO				
	53510 SILVERGATE AVENUE ROOM 103				
City	SAN DIEGO	State	CA	Zip Code	92152-5765
Country	U.S.A.	Telephone	(619) 553-3001	Fax	(619) 553-3821

Name (Print/Type)	PETER A. LIPOVSKY	Registration No. (Attorney/Agent)	32,580
Signature	<i>Peter A. Lipovsky</i>	Date	21 APR 99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any  
comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office,  
Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents,  
Box Patent Application, Washington, DC 20231.

**METHOD AND APPARATUS FOR SIMULTANEOUS TRANSMISSION OF SAME  
FREQUENCIES**

**BACKGROUND OF THE INVENTION**

This invention relates generally to communications and more specifically to communications accomplished via spiral antennas. More specifically, the invention relates to utilizing a spiral antenna design that provides linear polarization. With greater specificity, but without limitation thereto, the invention relates to using two or more linearly polarized, conductor-backed, spiral antennas to simultaneously transmit upon the same frequencies without interfering with each other.

Typically, antennas transmitting simultaneously on the same frequency will interfere with one another. Depending on the relative intensities of the transmissions, one transmission can overwhelm or "drown out" the other transmission.

Certain prior art methods designed to use the frequency spectrum efficiently rely upon complex methods of interlacing messages by time (TDMA) or by coding (CDMA). Another method uses crossed-log periodic antennas. The crossed-log antennas have broad bands and are linearly polarized but are not physically compact. Typically, these antennas extend in the direction perpendicular to propagation on the order of 0.5 wavelength and are often several times the wavelength in size in the direction along the line of propagation. Crossed dipoles and patches are yet a further application. These are relatively compact and are linearly polarized, but are not broad band. Yet another scheme of enhancing communications can be found in the satellite communication field. Antennas used to communicate with satellites often use helices.

FILE\NC79628.PAT\A.9

1

I hereby certify that I deposited the attached paper with the United States Postal Service as "Express Mail Post Office to Addressee" number EL261967844US in the envelope addressed to: **Commissioner of Patents and Trademarks** **Washington, DC 20231** on 21 APR 99  
Signature Peter G. Lapinski

## Navy Case 79628

1 The uplink signal is typically orthogonal to the downlink signal (e.g. right circularly polarization  
2 versus left circular polarization). Helical antennas are rarely compact. The cavity-backed spiral  
3 is another design that has been used in many antenna systems. The polarization of a cavity-  
4 backed spiral is typically circular and could be used in a dual transmitting mode by transmitting a  
5 right-circular polarized signal and receiving a left-circular polarized signal. In the cavity-backed  
6 spiral design, half the power utilized is absorbed in the cavity behind the spiral.

7 There is therefore a need within the art to provide an enhanced method of communicating  
8 that permits simultaneous transmission at the same frequencies from a relatively simple antenna  
9 system of efficient, compact and broad-band design.

### SUMMARY OF THE INVENTION

10 The invention provides a method and apparatus in which two or more conductor-backed,  
11 spiral antennas are used to simultaneously transmit or receive upon the same frequencies without  
12 interference. The conductor-backed spirals are broad-band in operation, typically exhibiting a  
13 9:1 ratio of maximum to minimum frequency. These spirals are also efficient, experiencing  
14 approximately a 6 dB advantage in gain on transmit and receive compared to a cavity-backed  
15 spiral.  
16

17 The invention utilizes specifically designed conductor-backed spiral antennas shown to  
18 exhibit linear polarization. For these conductor-backed spiral antennas, a change in frequency is  
19 synchronized to a change in the polarization vector of the communication signal. The amplitude  
20 (change in dB) of the polarity change is related in general to the thickness of the dielectric layer  
21 between the radiating elements of the antenna and its conductor backing.

## Navy Case 79628

1 To permit simultaneous transmission on the same frequencies, two, for example, of the  
2 linearly polarized, conductor-backed spiral antennas can be spaced vertically, for example, and  
3 are oriented so that the feed points of one antenna are orthogonal to the feed points of the second  
4 antenna. Since the specifically designed spiral antennas will be both transmitting or both  
5 receiving at orthogonally arranged polarizations, the antennas will not interfere with each other,  
6 even though communication is upon substantially the same frequency.

7 Accordingly, it is an object of this invention to provide a communication method and  
8 apparatus that enhances the efficiency of communication.

9 A further object of this invention is to provide a communication method and apparatus  
10 that enhances the efficiency of communication by using an antenna of simple design.

11 Yet another object of this invention is to provide a communication method and apparatus  
12 that enhances the efficiency of communication by using an antenna of relatively compact design.

13 Still a further object of this invention is to provide a communication method and  
14 apparatus that enhances the efficiency of communication by using an antenna of broad-band  
15 design.

16 Still a further object of this invention is to provide a communication method and  
17 apparatus that enhances the efficiency of communication by using an efficient antenna of simple,  
18 compact and broad-band design incorporating spiral antenna elements.

19 Other objects, advantages and new features of the invention will become apparent from  
20 the following detailed description of the invention when considered in conjunction with the  
21 accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates an exemplary schematic of the invention.

FIG. 2 illustrates a detailed view of the orientation of antennas as may be used according to the invention.

FIGS. 3 A-C illustrate an exemplary conductor-backed spiral antenna as may be used in the method of the invention.

FIG. 4 presents data on the axial ratio collected on three-turn conductor-backed spiral antennas as a function of frequency between 225 MHZ and 400 MHZ for spiral antennas having 6 inch, 3 inch and 1 inch thick dielectric spacing.

FIG. 5 presents data for the axial ratio collected on a ten-turn conductor-backed spiral antenna as a function of frequency between 225 MHZ and 400 MHZ in which the spiral antenna has a 1 inch thick dielectric spacing.

FIG. 6 presents data for the axial ratio collected on a twelve-turn conductor-backed spiral antenna as a function of frequency between 225 MHZ and 400 MHZ in which the antenna has a 3 inch thick dielectric spacing.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Research conducted by the U.S. Navy on antennas has indicated that specific spiral antennas of conductor-backed design are linearly polarized over a broad frequency band. This polarization has been found to depend upon frequency, the number of turns of the spiral antenna elements and the thickness of a dielectric disposed between the spiral antenna elements and their corresponding conductor backing.

## Navy Case 79628

1           The Navy study found that increasing the number of turns of the spiral increases the  
2 occurrence of polarization changes (from horizontal to vertical and vice-versa) for a given  
3 frequency range. It was also learned that in general the thickness of the dielectric layer between  
4 the spiral radiating elements and the conductor backing determines the magnitude (change in dB)  
5 of the polarization effect. For a conductor-backed spiral antenna with a relatively thin dielectric  
6 layer (one that is small compared to the utilized wavelength), a small change in frequency can  
7 cause a relatively large change in polarization. The studies were conducted on two-arm spirals,  
8 however it is envisioned that similar effects may also be attributable to conductor-backed spiral  
9 antennas having more than two spiral arms.

10           Referring now to FIG. 1, a schematic of the invention is shown. Transmitting array 10  
11 and receiving array 12 are substantially identical in physical as well as performance  
12 characteristics. Transmitting array 10 comprises two linearly polarized, broad band, conductor-  
13 backed spiral antennas 14 and 16 that are displaced vertically with respect to each other.  
14 Similarly, receiving array 12 comprises two linearly polarized, broad band, conductor-backed  
15 spiral antennas 18 and 20 that are also displaced vertically with respect to each other. The  
16 antennas should be designed and fabricated to be substantially identical in physical features,  
17 resulting also in a duplication of performance characteristics. As well be explained, however, the  
18 feeds on the antennas of each array are oriented orthogonally with respect to each other to  
19 provide different polarizations from the array.

20           The spiral antennas will be described in greater detail, however, as a general description,  
21 each of the antennas include at least a pair of spiral radiating elements or arms shown generally

## Navy Case 79628

as 22 and 22' and 24 and 24'.

Although antennas having two-armed spirals have been successfully employed to achieve desired polarization characteristics, it is also envisioned that spiral antennas containing a greater number of arms may also exhibit similar polarization performance characteristics. In the spiral antennas researched, the spiral radiating elements followed an Archimedean path and had two foot diameters of a variety of turns. As is well understood in the art of spiral antennas, the maximum diameter of the spirals and inner gap dimensions are determined by the minimum and maximum frequencies anticipated to be used with the antennas. Further, those skilled in the art will appreciate that other spiral configurations of the antenna elements of the invention may also be possible and still fall within the metes and bounds of the invention disclosed here.

Shown are conductor backings 26 and 28 for use with arrays 10 and 12, respectively. In conjunction with the two foot outer diameter spirals described here, a suitable conductor backing can take the configuration of a three foot by six foot rectangular plate. As can be seen the spiral radiating elements are separated from the conductor backings by a dielectric substrate 30, 30' and 32, 32' having substantially flat, opposite sides. A suitable dielectric for this purpose is marketed under the trademark name of DIVINYCELL and has a dielectric constant of approximately 1. Others materials with different dielectric constants could also be used to advantage.

In research conducted and as well be further explained, this substrate was varied in thickness to ascertain its affect on polarization performance. As a result of this research, it was learned that the degree (or change in dB) to which horizontal or vertical polarization dominates

## Navy Case 79628

1 depends upon the distance between the spiral radiating elements and the ground plane. To  
2 enhance a change in polarization upon a change in transmitted/or received frequency, the  
3 distance between the spiral elements and the ground plane (conductor) should be a small fraction  
4 of a wavelength of the energy radiated or received.

5 Referring again to FIG. 1, a transmitted signal "A" is received as signal "A' " and a  
6 transmitted signal "B" is received as signal "B' ". In this case, signals "A" and "B" have the  
7 same frequency, but are of a different polarization, as will be further explained.

8 Referring now to FIG. 2, a detailed view of spiral antennas as may be used with the  
9 invention are shown. Illustrated is a single array which may be used for either transmitting or  
10 receiving. An important consideration is that the two arrays and corresponding antennas are  
11 oriented substantially the same. In the example shown, vertically displaced spiral antennas 34  
12 and 36 have polarization vectors that are orthogonal to each other.

13 The orthogonality of the polarization vector permits two signals with the same frequency  
14 to be transmitted and received without interference with each other. This is accomplished by  
15 orienting an imaginary line drawn through the separate feed points of the antennas to be mutually  
16 perpendicular.

17 Referring again to FIG. 2, it can be seen that a line drawn through feed points 34' and 34"  
18 of antenna 34 and a line drawn through feed points 36' and 36" of antenna 36 are substantially  
19 perpendicular.

20 Referring now to FIGS. 3 A-C, a representative conductor-backed spiral antenna 38  
21 according to one embodiment of the invention is shown. Of, course, this representative example



## Navy Case 79628

1 is meant to be used for explaining the invention and should not be considered to be the one and  
2 only way in which the invention can be accomplished or even one a few ways in which the  
3 invention can be realized.

4 Referring to FIGS. 3A and 3B, spiral antenna 38 is shown to comprise spiral radiating  
5 elements 40, in this example shown as encompassing two arms of three turns and encompassing  
6 an actual outer diameter of two feet. Utilization of this spiral antenna has been successful with  
7 the use of two arms, however it is envisioned that a greater number of arms may also provide  
8 satisfactory results. Similarly, use of three turns has shown positive results, but an increase in  
9 the number of turns has also shown satisfactory, if not improved, performance for applications of  
10 the invention. Thus the two arm, three turn spiral elements described here is by no means  
11 intended to be a limitation of the invention.

12 In the specific example presented, spiral elements 40 are made up of photolithically  
13 applied conductive metal traces 42 applied to a first substantially flat side 44 of a dielectric  
14 substrate 46. Attached to metal traces 42 is a coaxial cable 48. In this implementation of the  
15 invention, the outer braided grounding shield (not shown) of coaxial cable 48 is soldered to metal  
16 traces 42 at various points along the path of the traces. At outer end 50 of spiral elements 40, the  
17 inner conductor (not shown) of coax cable 48 is shorted to the outer braid of the cable. At inner  
18 end 52 of spiral elements 40, the inner conductor of the two arms are joined and are soldered to  
19 the outer braid of the coax cable.

20 In this embodiment, the radiating elements are center-fed by means of an infinite balun.  
21 Alternatively, it can be envisioned that the antenna could be edge-fed by a balun. Connector 54

## Navy Case 79628

1 provides an input/output to the antenna elements and also an energization point. As is known in  
2 the art of spiral antennas, the length of the radiating elements and accordingly their largest  
3 diameter and inner gap are a function of the frequency expected to be used. As this is well  
4 understood within the art, greater details of this aspect of the antennas will not be presented here.  
5 It should also be understood that the particular feed and antenna energizations schemes discussed  
6 herein as well as the design of the spiral elements disclosed could be replaced by other  
7 configurations known in the art and still fall within the spirit of the invention disclosed here  
8 providing that an orthogonal feed arrangement as discussed above is maintained.

9 As can also be seen in FIGS. 3A and 3B, a conductor backing 56 is applied to a second  
10 substantially flat side 58 of dielectric substrate 46, such as by way of an adhesive. As previously  
11 described, the thickness or distance of the dielectric member between spiral radiating arms 40  
12 and conductor backing 56 was varied to determine what affect, if any, this would have on  
13 varying the polarization of the antennas. Following is a description of the findings of this  
14 research.

15 A measure of the dominance of one polarization over another is known as an axial ratio.  
16 Referring to FIG. 3C, a legend is shown corresponding to this measurement. One measure of the  
17 signal is its gain in decibels (dB). The axial ratio can be defined as the difference in gain between  
18 vertical and horizontal polarization at a particular frequency ( $GAIN(V) - GAIN(H)$ ). An antenna  
19 with circular polarization has an axial ration near 0 dB.

20 FIG. 4 presents data on the axial ratio for a three-turn, 1, 3 and 6-inch thick dielectric spiral  
21 as a function of frequency between 225 and 400 MHZ and illustrates the linear polarization

1 characteristic of the conductor-backed spiral antenna. This data was obtained at 5 MHZ frequency  
2 intervals at the Space and Naval Warfare Systems Center antenna range located in San Diego,  
3 California. Each three-turn spiral antenna had a frequency difference between successive  
4 maximums between 70 and 75 MHZ.

5 The 6-inch thick spiral had a difference between maximum and minimum for an axial ratio  
6 of 17.15 dB. The 3-inch thick spiral had a corresponding difference of 30.45 dB. The difference for  
7 the 1-inch thick spiral was 42.59 dB. This data of course indicates that the thinner dielectric  
8 substrate provides the most profound change in gain between polarizations, suggesting that  
9 minimizing the substrate thickness will accentuate a change in polarization as frequency increases.

10 FIG. 5 presents data for the axial ratio of a ten-turn, 1-inch thick spiral. The additional turns  
11 can be applied and connected as with the three turn embodiment of the invention. The data shows a  
12 rapid variation in polarization change as a function of frequency. The difference between maximum  
13 and minimum was found to be 36.47 dB.

14 FIG. 6 presents the axial ratio for a twelve-turn, 3-inch thick dielectric spiral antenna. As  
15 with the other embodiments of the invention, the additional turns can be similarly applied and  
16 connected. Measurements were obtained at frequency intervals of 1 MHz. The frequency  
17 difference between successive maximums was 18 MHZ, a factor of 4 smaller than the three-turn  
18 spiral. The difference between maximum and minimum was 32.4 dB.

19 A factor that limits the number of signals that can be transmitted simultaneously is the  
20 frequency spectrum allotted to the application. Typically, providers pay huge sums of money to  
21 purchase the rights to use portions of the frequency spectrum. A broad band device that can  
22 double the number of users within a frequency band would be very advantageous.

## Navy Case 79628

1           The invention is a method and a device that uses the frequency spectrum more efficiently.  
2           The device described will at least double the number of users that can send signals within a  
3           particular frequency band. The invention includes a compact antenna with linear polarization  
4           and a broad frequency spectrum over which it can radiate efficiently. The conductor-backed  
5           spiral antenna described also has a 6 dB advantage in gain on transmit and receive over cavity-  
6           backed spiral antenna designs. These designs absorb half the power used via a lossy material in  
7           the cavity behind the spiral.

8           One feature of the conductor-backed spirals described is that if the thickness of the  
9           dielectric layer that separates the spiral antenna elements from the conductor is small compared  
10          to the utilized wavelength, the polarization of the antenna will be dependent on the frequency.  
11          The variation of the polarization depends upon both the thickness and the number of antenna  
12          element turns. This variation of the polarization with frequency presents the further advantage  
13          that two signals in the same antenna with slightly different frequencies will be somewhat isolated  
14          from each other. A given frequency band can thus be further divided into sub-bands using these  
15          antennas.

16          Obviously, many modifications and variations of the invention are possible in light of the  
17          above teachings. It is therefore to be understood that within the scope of the appended claims the  
18          invention may be practiced otherwise than as has been described.

THE CLAIMS

What is claimed is:

CLAIM 1

1 An antenna apparatus comprising:

2 first and second linearly-polarized conductor-backed spiral antennas wherein said  
3 antennas both simultaneously transmit or both simultaneously receive on substantially the same  
4 frequencies, wherein said antennas are spaced from each other and further wherein each of said  
5 antennas comprises:

6 a substrate having first and second flat, opposite, sides;

7 a pair of spiral antenna elements disposed on said first side of said substrate in which  
8 each of said elements has a corresponding feed point; and

9 a conducting ground plane disposed on said second side of said substrate,  
10 wherein said first antenna and said second antenna are oriented so that an imaginary line drawn  
11 through said feed points corresponding to said first antenna does not coincide with an imaginary  
12 line drawn through said feed points corresponding to said second antenna.

CLAIM 2

1 The apparatus of claim 1 wherein said antennas are spaced vertically to radiate substantially  
2 parallel.

CLAIM 3

**Navy Case 79628**

1 The apparatus of claim 1 wherein said imaginary line drawn through said feed points  
2 corresponding to said first antenna is orthogonal to said imaginary line drawn through said feed  
3 points corresponding to said second antenna.

**CLAIM 4**

1 The apparatus of claim 1 in which said spiral elements take the form of an Archimedean spiral.

**CLAIM 5**

The apparatus of claim 1 wherein said spiral elements comprise a metal foil.

**CLAIM 6**

The apparatus of claim 1 wherein said antenna elements of said first and second antennas are  
mounted in a common plane.

**CLAIM 7**

1 The apparatus of claim 1 wherein said substrate has a dielectric constant of approximately 1.

**CLAIM 8**

1 The apparatus of claim 7 wherein said substrate comprises a dielectric of DIVINYCELL  
2 (trademark).

**Navy Case 79628**

**CLAIM 9**

1 The apparatus of claim 1 wherein said first and second antennas share a common conducting  
2 ground plane.

**CLAIM 10**

1 The apparatus of claim 1 wherein the performance of each of said antennas can be described by  
2 an axial ratio defined as the difference between vertical gain and horizontal gain at a particular  
3 frequency and wherein said axial ratio varies by no less than plus or minus 5 dB.

**CLAIM 11**

The apparatus of claim 10 wherein said spiral antenna elements makes at least three 360 degree  
turns.

**CLAIM 12**

The apparatus of claim 11 wherein said substrate separates said spiral antenna elements from said  
2 conducting ground plane by a distance that is no greater than 6 inches.

**CLAIM 13**

1 The apparatus of claim 12 wherein said imaginary line drawn through said feed points  
2 corresponding to said first antenna is orthogonal to said imaginary line drawn through said feed  
3 points corresponding to said second antenna.

**Navy Case 79628**

**CLAIM 14**

1 The apparatus according to claim 12 wherein said antennas operate between 225 megaHertz and  
2 400 megaHertz.

**CLAIM 15**

1 The apparatus of claim 11 wherein said substrate separates said spiral antenna elements and said  
2 conducting ground plane by a distance that is no greater than 3 inches.

**CLAIM 16**

The apparatus of claim 15 wherein said imaginary line drawn through said feed points  
corresponding to said first antenna is orthogonal to said imaginary line drawn through said feed  
points corresponding to said second antenna.

**CLAIM 17**

2 The apparatus of claim 15 wherein said antennas operate between 225 megaHertz and 400  
3 megaHertz.

**CLAIM 18**

1 The apparatus of claim 11 wherein said substrate separates said spiral antenna elements and said  
2 conducting ground plane by a distance that is no greater than 1 inch.



**Navy Case 79628**

**CLAIM 19**

1 The apparatus of claim 18 wherein said imaginary line drawn through said feed points  
2 corresponding to said first antenna is orthogonal to said imaginary line drawn through said feed  
3 points corresponding to said second antenna.

**CLAIM 20**

The apparatus of claim 18 wherein said antennas operate between 225 megaHertz and 400  
megaHertz.

**CLAIM 21**

An antenna apparatus comprising:

first and second linearly-polarized conductor-backed spiral antennas wherein said  
antennas both simultaneously transmit or both simultaneously receive on substantially the same  
4 frequencies, wherein said antennas are spaced from each other and further wherein each of said  
5 antennas comprises:

6 a substrate having first and second flat, opposite, sides;

7 a pair of spiral antenna elements disposed on said first side of said substrate in which  
8 each of said elements has a corresponding feed point, said spiral antenna elements making at  
9 least three 360 degree turns; and

**Navy Case 79628**

10 a conducting ground plane disposed on said second side of said substrate, wherein said  
11 substrate separates said spiral antenna elements from said conducting ground plane by a distance  
12 that is no greater than 6 inches,

13 wherein said first antenna and said second antenna are oriented so that an imaginary line drawn  
14 through said feed points corresponding to said first antenna is orthogonal to an imaginary line  
15 drawn through said feed points corresponding to said second antenna.

**CLAIM 22**

The apparatus of claim 21 wherein said antennas are spaced vertically.

**CLAIM 23**

The apparatus of claim 21 in which said spiral takes the form of an Archimedean spiral.

**CLAIM 24**

1 The apparatus of claim 21 wherein said spiral elements comprise a metal foil.

**CLAIM 25**

1 The apparatus of claim 21 wherein said antenna elements of said first and second antennas are  
2 mounted in a common plane.

**Navy Case 79628**

**CLAIM 26**

1 The apparatus of claim 21 wherein said substrate has a dielectric constant of approximately 1.

**CLAIM 27**

1 The apparatus of claim 26 herein said substrate comprises a dielectric of DIVINYCELL  
2 (trademark).

**CLAIM 28**

The apparatus of claim 21 wherein said first and second antennas share a common conducting ground plane.

**CLAIM 29**

The apparatus according to claim 21 wherein said antennas operate between 225 megaHertz and 400 megaHertz.

**CLAIM 30**

1 The apparatus of claim 21 wherein said substrate separates said spiral antenna elements and said  
2 conducting ground plane by a distance that is no greater than 3 inches.

**CLAIM 31**

**Navy Case 79628**

1 The apparatus of claim 30 wherein said antennas operate between 225 megaHertz and 400  
2 megaHertz.

**CLAIM 32**

1 The apparatus of claim 21 wherein said substrate separates said spiral antenna elements and said  
2 conducting ground plane by a distance that is no greater than 1 inch.

**CLAIM 33**

The apparatus of claim 32 wherein said antennas operate between 225 megaHertz and 400  
megaHertz.

65T.240-8965250

**Navy Case 79628**

**CLAIM 34**

1 A communications method comprising:

2 using first and second linearly polarized, conductor-backed spiral antennas to both  
3 simultaneously transmit or both simultaneously receive on substantially the same frequencies,  
4 wherein said antennas are spaced from each other and further wherein each of said antennas  
5 comprises:

6 a substrate with first and second flat, opposite, sides;

7 a pair of spiral antenna elements disposed on said first side of said substrate in which  
8 each of said elements has a corresponding feed point, said spiral antenna elements making at  
9 least three 360 degree turns; and

10 a conducting ground plane disposed on said second side of said substrate, wherein said  
11 substrate separates said spiral antenna elements from said conducting ground plane by a distance  
12 that is no greater than 6 inches,

13 wherein said first antenna and said second antenna are oriented so that an imaginary line drawn  
14 through said feed points corresponding to said first antenna does not coincide with an imaginary  
15 line drawn through said feed points corresponding to said second antenna.

**CLAIM 35**

1 The method of claim 34 wherein said antennas are oriented so that said imaginary line drawn  
2 through said feed points corresponding to said first antenna is orthogonal to said imaginary line

**Navy Case 79628**

3 drawn through said feed points corresponding to said second antenna.

**CLAIM 36**

1 The apparatus of claim 35 wherein said antennas are spaced vertically.

**CLAIM 37**

1 The apparatus of claim 34 wherein said antenna elements of said first and second antennas are  
2 mounted in a common plane.

**CLAIM 38**

The method of claim 34 wherein said first and second antennas are included in a first antenna  
array and further wherein duplicates of said first and second antennas are included in a second  
antenna array.

**CLAIM 39**

1 The method according to claim 38 wherein said first and second antenna arrays are used for  
2 transmitting and receiving communication on substantially the same frequencies wherein one of  
3 said arrays is used for transmitting and the other of said arrays is used for receiving.

**CLAIM 40**

1 The method of claim 35 wherein said first and second antennas are included in a first antenna

**Navy Case 79628**

1 The method of claim 35 wherein said first and second antennas are included in a first antenna  
2 array and further wherein duplicates of said first and second antennas are included in a second  
3 antenna array.

**CLAIM 41**

1 The method according to claim 39 wherein said first and second antenna arrays are used for  
2 transmitting and receiving communication on substantially the same frequencies wherein one of  
said arrays is used for transmitting and the other of said arrays is used for receiving.

**CLAIM 42**

The apparatus according to claim 34 wherein said antennas are operated between 225 megaHertz  
and 400 megaHertz.

**CLAIM 43**

1 The apparatus of claim 34 wherein said substrate separates said spiral antenna elements and said  
2 conducting ground plane by a distance that is no greater than 3 inches.

**CLAIM 44**

1 The apparatus of claim 43 wherein said antennas operate between 225 megaHertz and 400  
2 megaHertz.

**Navy Case 79628**

**CLAIM 45**

- 1 The apparatus of claim 34 wherein said substrate separates said spiral antenna elements and said  
2 conducting ground plane by a distance that is no greater than 1 inch.

**CLAIM 46**

- 1 The apparatus of claim 45 wherein said antennas operate between 225 megaHertz and 400  
2 megaHertz.

09:59:04.19  
"04:19"  
09:59:04.19



ABSTRACT OF THE DISCLOSURE

A method and apparatus for communicating simultaneously at the same frequencies includes two or more conductor-backed, spiral antennas that have been shown to exhibit linear polarization. To permit simultaneous transmission on the same frequencies, two of the linearly polarize, conductor-backed spiral antennas can be spaced vertically and be oriented so that the feed points of one antenna are orthogonal to the feed points of the second antenna. Since the specifically designed spiral antennas will be both transmitting or both receiving at orthogonally arranged polarizations, the antennas will not interfere with each other, even though communication is upon substantially the same frequencies.

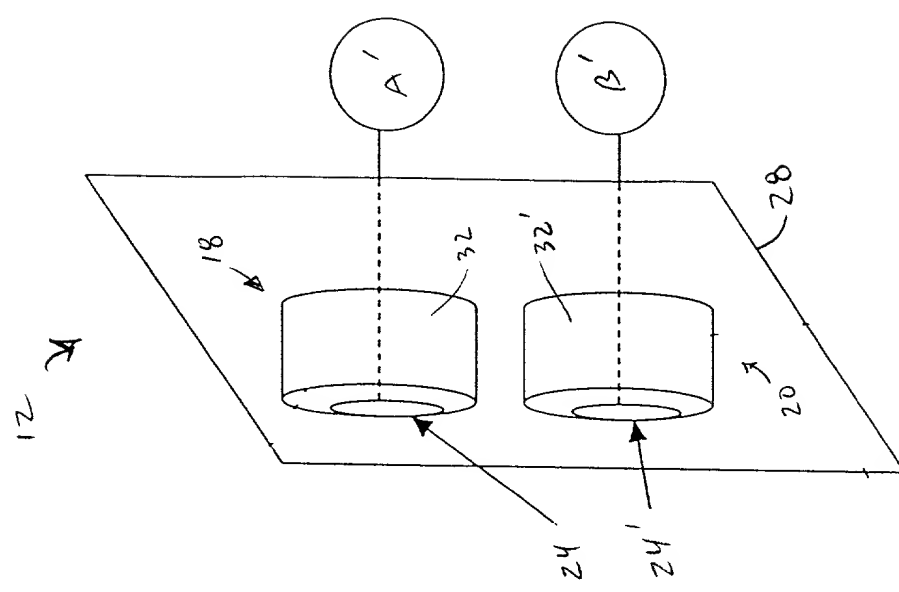
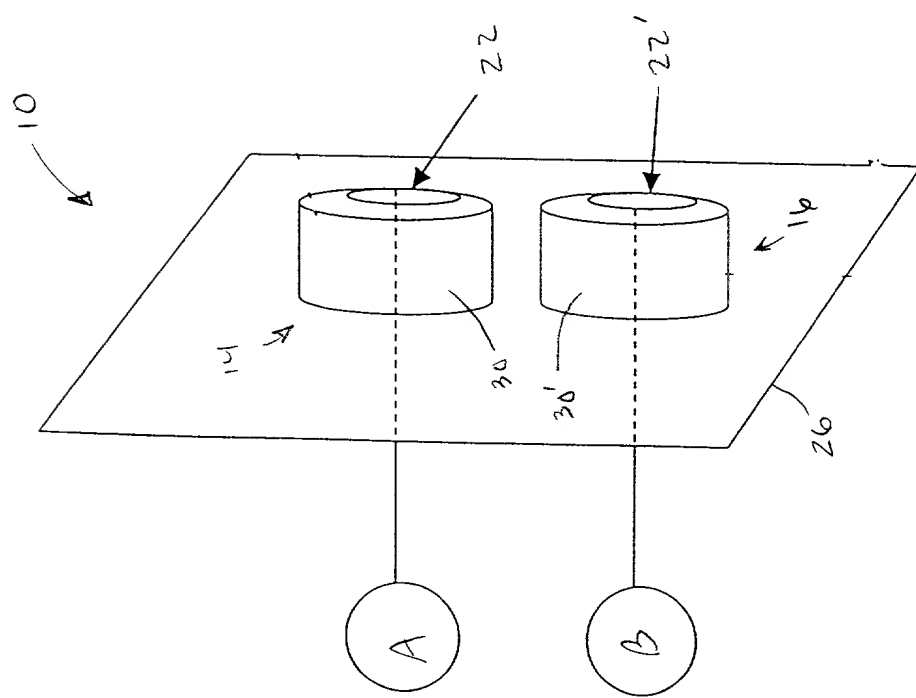


FIG. 1



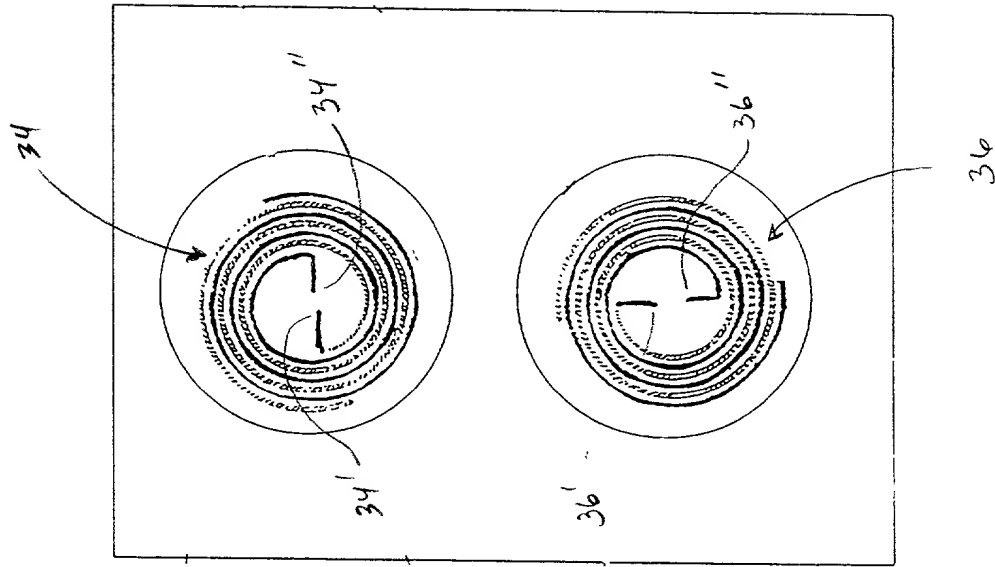


FIG. 2

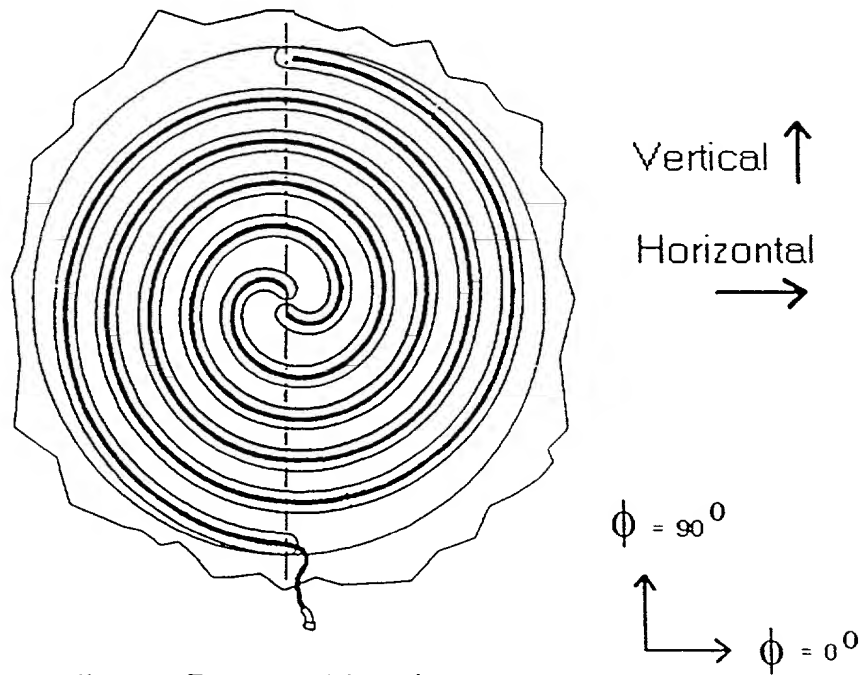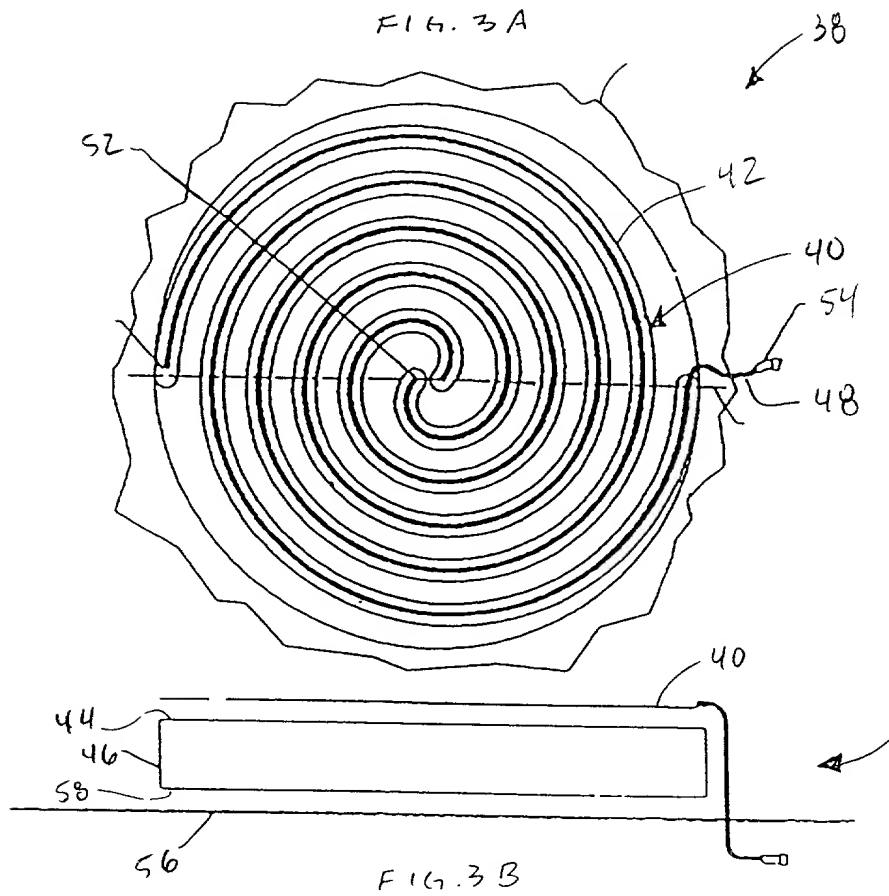

Coordinate System Used

In The  $\phi = 0^\circ$  Plane  $E_H = |E_\theta|$   $E_V = |E_\phi|$

FIG 3C

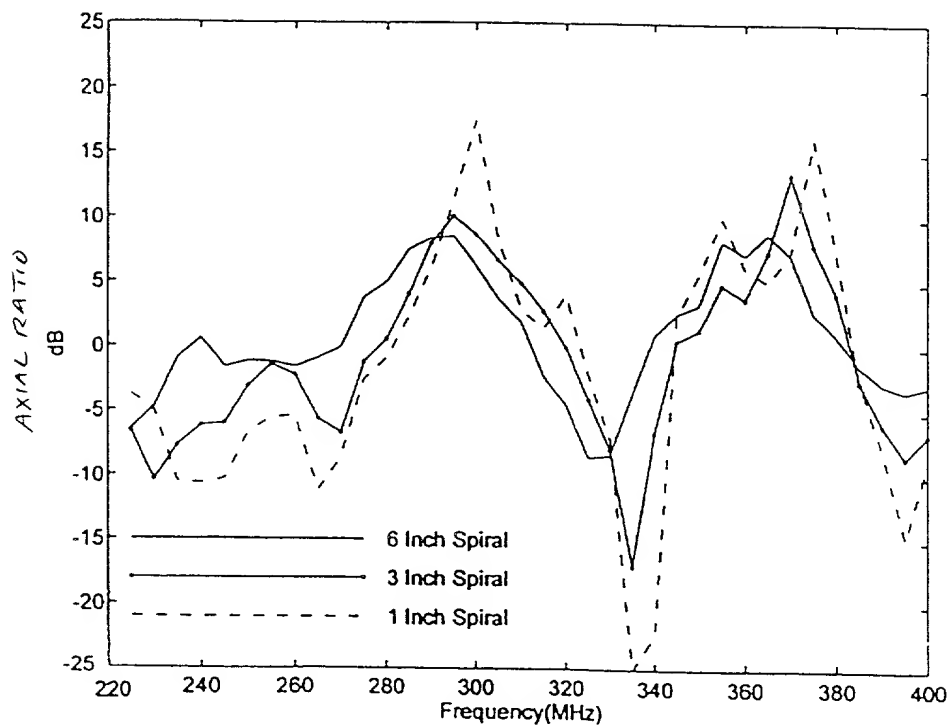


FIG. 4

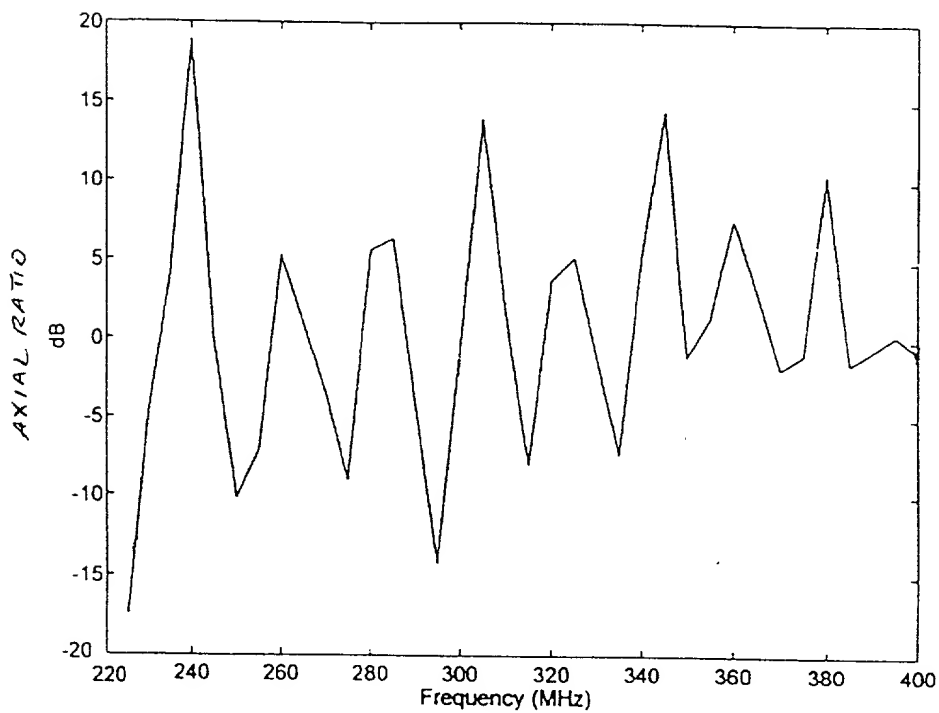


FIG. 5

66T-240-85656260

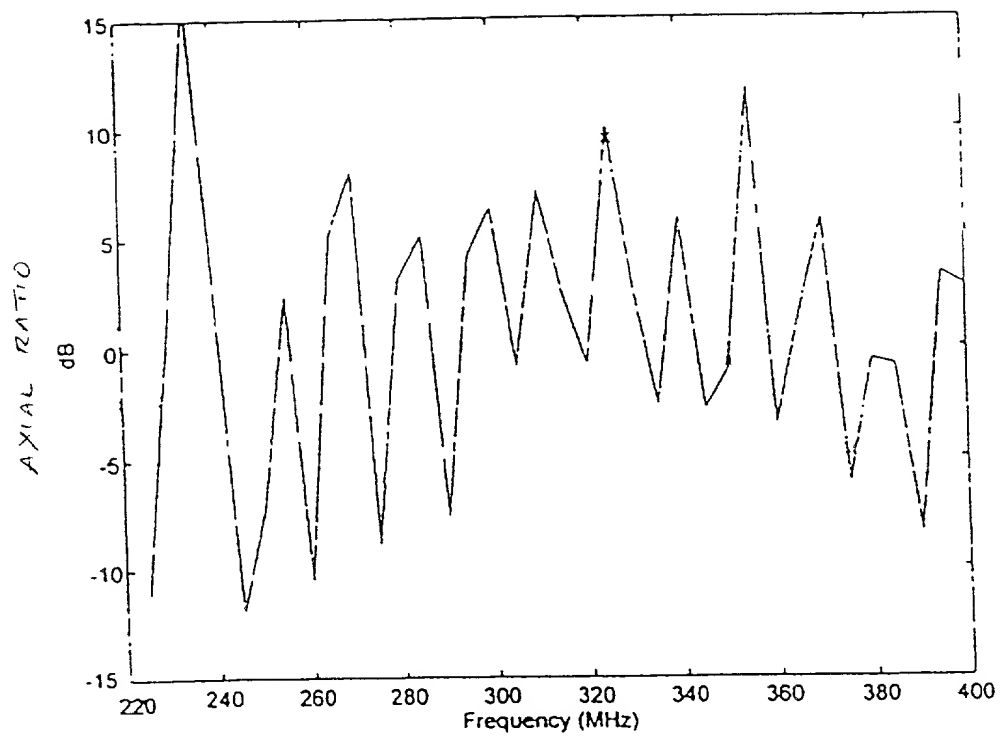


FIG. 6

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)  
Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR  
DESIGN  
PATENT APPLICATION  
(37 CFR 1.63)**

☒ Declaration Submitted with Initial Filing **OR** ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number	79628
First Named Inventor	R. C. Adams et al.
<b>COMPLETE IF KNOWN</b>	
Application Number	-- /
Filing Date	--
Group Art Unit	--
Examiner Name	--

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

DEVICE FOR SIMULTANEOUS TRANSMISSION OF TWO SIGNALS WITH IDENTICAL FREQUENCY

the specification of which (Title of the Invention)

☒ is attached hereto  
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → +

PTO/SB/01 (12-97)  
Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer  
Number Bar Code  
Label here

Name	Registration Number	Name	Registration Number
Harvey Fendelman	27,030		
Michael A. Kagan	33,188		
Peter A. Lipovsky	32,580		
Eric James Whitesell	38,657		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number  OR ☒ Correspondence address below

Name	Commanding Officer, Office of Patent Counsel				
Address	SPAWARSYSCEN D0012				
Address	53510 Silvergate Ave. Rm 103				
City	San Diego	State	CA	ZIP	92152-5765
Country	US	Telephone	619-553-3001	Fax	619-553-3821

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))		Family Name or Surname			
Richard C.		Adams			
Inventor's Signature	Richard C. Adams			Date	4/21/99
Residence: City	San Diego	State	CA	Country	U.S.A.
				Citizenship	U.S.A.
Post Office Address	4878 Saratoga Avenue, #204				
Post Office Address	San Diego, CA 92107				
City	San Diego	State	CA	ZIP	92107
				Country	U.S.A.

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto



Please type a plus sign (+) inside this box → +

PTO/SB/02A (3-97)

Approved for use through 9/30/98 OMB 0651-0032  
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION

ADDITIONAL INVENTOR(S)  
Supplemental Sheet  
Page 3 of 3

<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Barry R.				Hunt			
Inventor's Signature						Date	
Residence: City	San Diego	State	CA	Country	U.S.A.	Citizenship	U.S.A.
Post Office Address	3658 Charles Street						
Post Office Address	San Diego, CA 92106						
City	San Diego	State	CA	ZIP	92106	Country	U.S.A.
<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	
<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.